
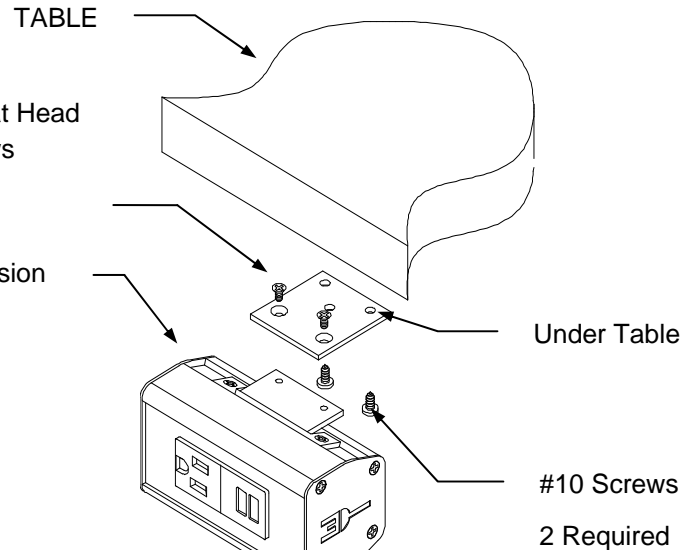


## Table Top Mounting

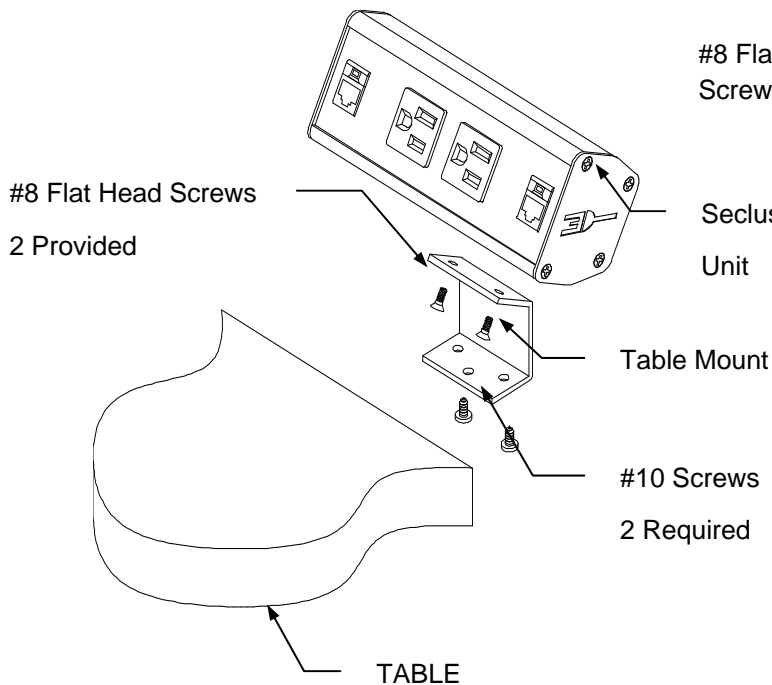

## Under Table Mounting

SECL-1-USB Shown

1. Determine if Seclusion is to be top or under table mounted, see illustrations above.
2. Attach either Table Mount or Under Table Bracket to Seclusion using 2 #8 flat head machine screws, provided. Note: On under table mount forward edge of Seclusion to be a minimum of 1" back from table edge.
3. Determine location for Seclusion and attach to table, as shown, using 2 #10 screws, provided (Note: Use caution to not pierce top surface of table with screws, minimum table thickness .75" thick).
4. Make data connections if required (use caution when snapping RJ's into faceplate to prevent them from falling into Seclusion).