

Assembly Instructions


⚠ Important ⚠

Before you begin, read and comply with all safety and operating instructions, and ensure all parts and correct quantities are included.


Any parts damaged during shipment must be reported within 5 days of receipt. To report information regarding missing parts or damage, to purchase parts or accessories, or if you have any questions, please contact us.

www.spectrumfurniture.com
800-235-1262, 715-723-6750


Thank you for purchasing Spectrum products!

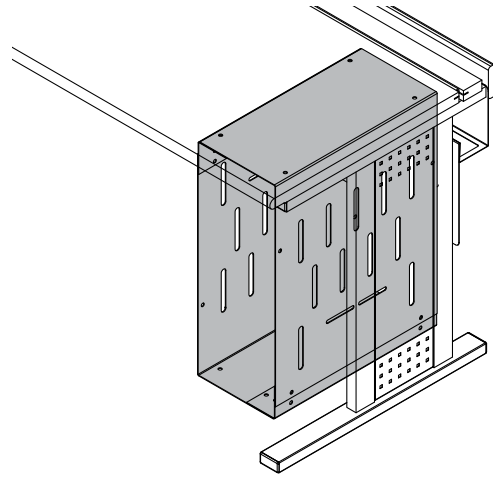


Adjustable CPU Sling 95500



(2) 042020
Sling Side



(2) 042021
Corner Brackets




(2) 042019
Leg Bracket



(2) 044890
1 x .275 ID x .5
OD Nylon Spacer



(4) 026017
1/4-20 x 1/2
PHMS




(7) 042025
1/4-20 x 3/8
THMS



(4) 026057
#10 x 3/4
PHSM




(6) 041943
1/4-20 Locknut



(1) 042139
Drill template


Used with 48", 60", and 72" desks



(1) 042110
2" x 2" x 1"
Shim



(4) 021605
#10 x 1-3/4
PHSM



(4) 026547
1/4-20 x 1-1/2
PHMS

Tools Required



Phillips
screwdriver



7/16" or
adjustable
wrench



Drill with 1/8" drill bit
(for desks without
threaded inserts)

1. Assemble and adjust CPU sling

- Determine the height and width required for your CPU.
- Adjust the CPU sling to the height and width of your CPU using the three adjustment holes and attach the corner brackets using the 1/4-20 x 3/8" truss head machine screws and 1/4-20 locknuts as shown in **Figure 1A**. The screws install from the inside with the locknuts on the outside. Note the positions of the corner brackets at the top and bottom of the sling. **Figure 1B**.

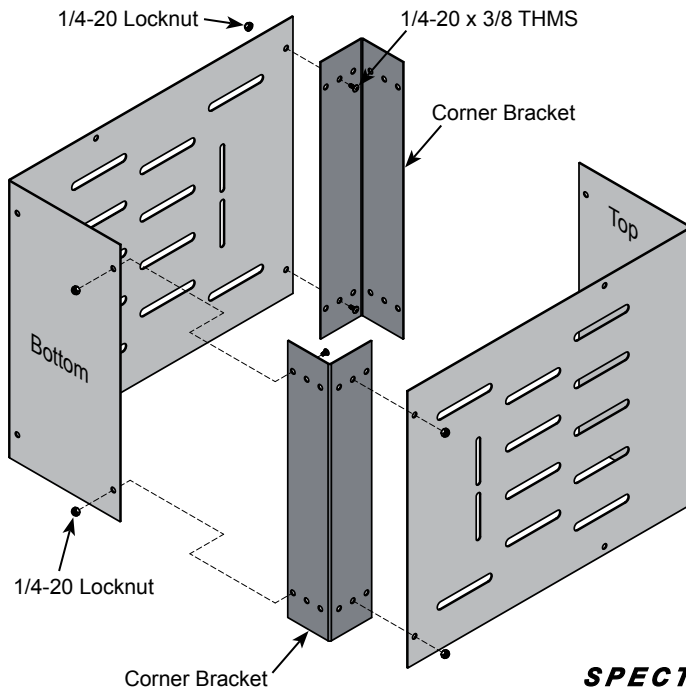


Figure 1A

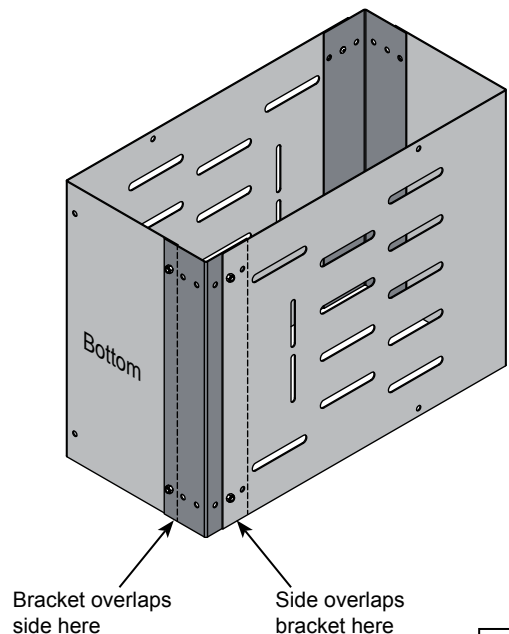


Figure 1B

2. Attaching sling to desks with threaded inserts

Note: If desk does not have threaded inserts, skip to step 3.

DESKS WITHOUT SUPPORT BRACE

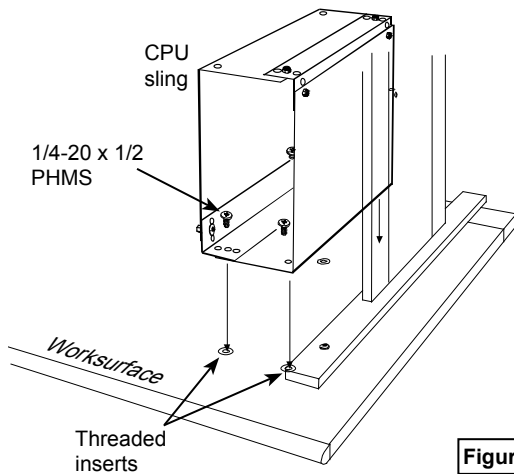


Figure 2A

Note: Desks without the support brace use two 1/4-20 x 1/2" PHM screws (026017).

DESKS WITH SUPPORT BRACE

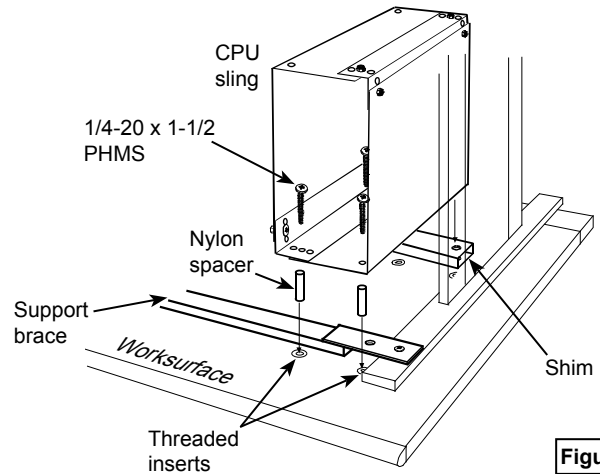


Figure 2B

Note: Desks with the support brace use (2) nylon spacers (044890) in the front holes, and the back support shim (042110) in the rear holes with the longer 1/4-20 x 1-1/2" PHM screws (026547). The front of the sling will extend past the support brace.

1. Determine if the CPU sling will mount on the right or left side of the desk and align the top sling holes with the appropriate set of inserts. **Figure 2A-B** shows a sling being mounted on the left side of a desk.
2. Attach the sling to the worksurface using (4) 1/4-20 PHM screws and tighten.

3. Attaching sling to desks without threaded inserts

1. Determine if the CPU sling will mount on the right or left side of the desk.
2. Fold and tape the enclosed drill template (042139) to the underside of the worksurface in the position shown in **Figure 3A**. Wrap a piece of tape around a 1/8" drill bit to mark 3/4" from the end of the bit - **Figure 3B**. Carefully drill 3/4" deep through the template at the four marked hole locations. **Figure 3A**.
3. Attach CPU sling to worksurface using (4) #10 sheet metal screws.

Note: Desks without threaded inserts or support brace use (4) #10 x 3/4" PHSM screws (026057.) Desks without inserts that include a support brace as in **Figure 3A**, use (2) nylon spacers (044890) in the student-side holes, and one support shim (042110) in the rear holes using the longer #10 x 1-3/4" PHSM screws (021605). The front of the CPU sling will extend past the support brace.

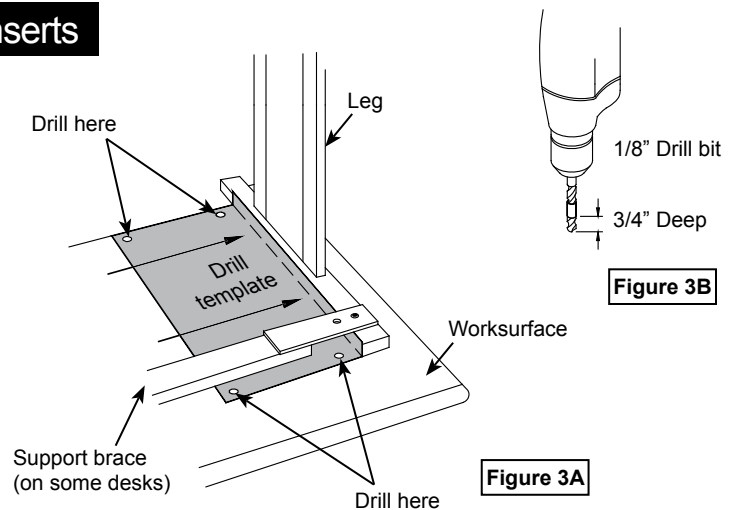


Figure 3B

Figure 3A

4. Attach leg bracket

Note: If the CPU sling is being used on a CLASS™ or Evolution™ desk, the included (042019) leg bracket should be attached to the sling.

1. Line up the bracket with the front slot of the CPU sling as shown and attach with (1) 1/4-20 x 3/8" THM screw (042025). **Figure 4**.
2. Adjust the leg bracket until it is snug against the leg, then tighten screw to secure.

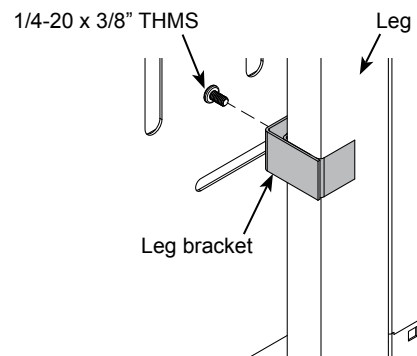


Figure 4