



Connect36[™] Mobile Device Cart

Technical Specifications



Use the Connect36 Cart to store, transport, and charge up to 36 devices. Three charging options are available. Flexible dividers protect the devices. The overhead wire management aids the wiring integration and allows the charging plugs to hang in front of each device. The cart's compact footprint and top handles provide easy mobility. The economical Connect36 cart is made with heavy-gauge steel for security and powder-coated for a durable, long-lasting finish. Locking doors and panel increase notebook security.






Features and Benefits

- · Stores, charges, and transports up to 36 devices (most Chromebooks, tablets*, and notebooks up to 15.6" diagonal)
- 1.3"W x 17.59"D x 13"H storage bay
- Numbered storage bays
- Small cart footprint (29"W x 25"D) saves valuable space
- Durable ABS plastic dividers protect notebooks from scratching (dividers are removable to provide storage space for thicker devices)
- Recessed lock and cord wrap design eliminates damage through doorways
- Heavy gauge student-side doors feature a recessed dual-bolt steel lock with padlock hasp. (Padlock not included).
- Heavy gauge instructor-side panel has a recessed padlock hasp for security. (Padlock not included).
- Devices and students are separated from AC line voltage
- Superior, all-metal overhead cord management system keeps charge cords organized above each bay and make the Connect36 the fastestto-wire cart in the industry
- PowerProdigy[™] timer that senses current from both power units and distributes power (up to 10A) to the least-charged devices first (where charging is needed most) *For most power adapters up to 65W
- eLogix[™] timer provides cycling power to both power units (non current-sensing) *For most power adapters up to 65W
- Power switch provides continuous power to both power units (non current-sensing) *For most power adapters up to 35W
- · Cart is available prewired with USB-C PD chargers
- Horizontally adjustable, (125V~/12A, 60Hz) universal power units work with most inline adapters (36 outlets)
- External power switch provides easy-access for safe power connection / disconnection
- External LED illumination on timers indicate charge status while doors are closed
- Large wiring trays on power-side provide convenient power adapter and wiring storage
- Ventilated doors and side panels keep devices and chargers cool, preventing overheating, and extending device life

- · Replaceable, IEC (quick-release) 8' nominal 14 AWG, 3-wire power cord and external recessed cord wrap brackets provide easy power access
- Four inboard 5" balloon wheel plate casters (two locking, two nonlocking) with metal construction and non-marring rubber provide easy rolling, and quiet transport (rated for 300 lb each)
- Integrated handles in top panel provides control and maneuverability
- Cart ships fully-assembled for quick, simple integration and deployment
- Durable powder coated steel chassis provides a long-lasting finish •
- ETL recognized (certified to UL 60950-1) in the US and Canada for the cart and electrical system
- Warranted to be free of all defects in materials and workmanship for 10 years, electrical system 2 years
- Designed and assembled in Chippewa Falls, WI, USA

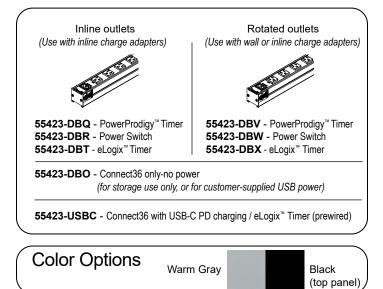

*Accessory power plug may be needed revised 9/19/22

55423

Construction


- 16-gauge top cover
- 20-gauge doors, side panels, power-side panel, and base
- All metal components are finished with a scratch-resistant powder coat epoxy
- ABS plastic dividers
- · This cart is factory-assembled, packaged, and shipped on its own skid


Specifications

Capacity		36 devices. (Most Chromebooks, tablets*, or notebooks) *Accessory power plug may be needed		
Storage bays (nominal)	1.3"W [3.3 cm] x 17.59"D [44.7 cm] x	1.3"W [3.3 cm] x 17.59"D [44.7 cm] x 13"H [33 cm]		
Electrical	 Two 18-outlet power units 125V~/12A, 60Hz 15-amp breaker IEC quick-release (replaceable) 8' nominal, 14 AWG, 3-wire power cord 	 Locking power-side panel isolates and separates electrical line voltage from students ETL recognized (certified to 60950-1) 		
Charging options (See p.4 for specs)	maxing out the storage and charging c	of the amp draw of the devices used with this cart-especially when apacity. Exceeding 15 amps will trip the circuit breaker. Please ecific device for power consumption information.		
5" Balloon Wheels	Weight capacity 300 lb [136.2 kg] ea	ch (two locking, two non-locking)		
Certifications / Compliance	ETL recognizedSCS Indoor Advantage Certified	Meets or exceeds applicable ANSI-BIFMA test standards		
Unit weight (nominal)	132 lb [60 kg]			
Shipping weight (nominal)	180 lb [81.7 kg]			
Specifications subject to change without not	ce			


USB-C PD Charger Note: Do not place items weighing more than 50 lb [22.7 kg] on the top (USB-C PD prewired cart only) surface. Please remove or secure items before moving cart. Specifications: Numbered storage bays Model: HA712 Input: 100-240V ~ 50/60Hz 1.5A Output (USB-C PD): 5V~3A 9V~3A 12V~3A 15V~3A 20V~3.25A Dimensions: 1.97" x 1.97" x 1.10" (50mm x 50mm x 28mm) Net Weight: 3.42 oz [97 g] 5" Balloon Wheel Note: (2) locking, and (2) non-locking 2.375 casters are included on each cart. [6.03 cm] 0000000000 Ħ ≠ W 6.157 [15.64 cm] ï5 [Ø12.7 cm] Devices must be placed in the bays with the charge 1.223 plug on one of the two exposed edges shown. [3.11 cm]

Device-side locking doors

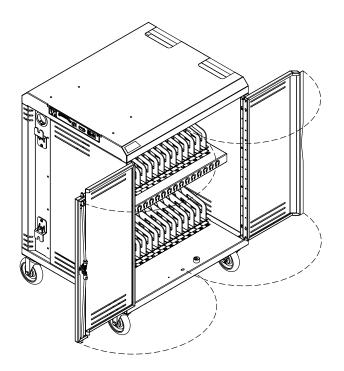




Device-side doors

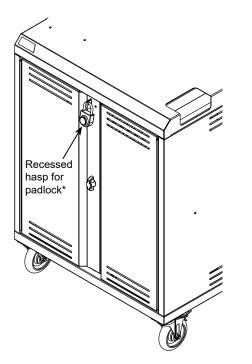



Power-side locking access panel

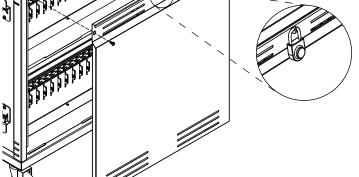

Electrical Options

Connect36 [™] Electrical comparison				
PowerProdigy™ Timer	eLogix™ Timer	Power Switch		
1		1	External auxiliary outlet	
✓	1	1	Internal auxiliary outlet	
~	1	1	External on/off switch	
✓			Load-sensing technology	
	1		2 bank	
1		1	4 bank	
*	4		Max charging capacity: <u>5,760 watts</u> (on Connect36, most power adapters up to 65W)	
		1	Max charging capacity: <u>1,440 watts</u> (on Connect36, most power adapters up to 35W)	
4	1		LED lights indicate charging status	
1	1	1	ETL certified to 60950-1	

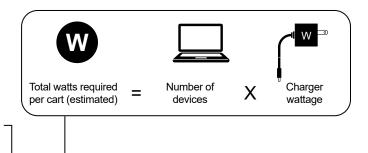

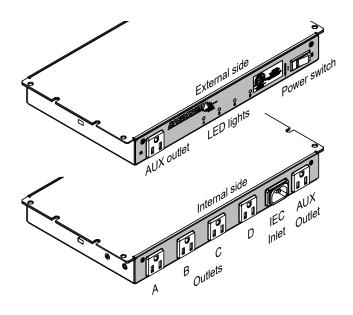

PowerProdigy[™] Timer (Q)

Use with higher amp-draw devices. Maximum charging capacity: 5,760 watts.

- Smart charging senses current and distributes power to the power units requiring it most
- Four timed power unit-dedicated
 outlets (labeled A, B, C, D)
 controlled by logic board

Input:

- Four green LED lights indicate charging activity status of each power unit
 Two auxiliary outlets (1 external,

15A, 250 VAC
15 minutes
4 timed (A, B, C, D) up to 10A
1A each (controlled by main power switch)
IEC quick-release (replaceable)
8' nominal, 14 AWG, 3-wire
15A (externally accessible)

eLogix[™] Timer (T)

The eLogix[™] timer charges one half of the devices for 15 minutes, then charges the second half of the devices for another 15 minutes. This cycling occurs automatically and is not adjustable. Maximum charging capacity: 2,880 watts.

- Two timed power-unit dedicated outlets (labeled A, B) (up to 10A power output)
- Two green LED lights indicate charging activity status
- One auxiliary outlet (external)
- ETL recognized (certified to 60950-1)


125V~/12A, 60Hz
15A, 250 VAC
15 minutes
4 timed (A, B) up to 10A
1A (controlled by main power switch)
IEC quick-release (replaceable)
8' nominal, 14 AWG, 3-wire
15A (externally accessible)


Power Switch (R)


The Power Switch provides continuous power to <u>all</u> power units. Use with lower amp-draw devices. Maximum charging capacity: 1,440 watts.


- Four continuous power-unit dedicated outlets (labeled A, B, C, D)
- Two auxiliary outlets (1 external, 1 internal)
- ETL recognized (certified to 60950-1)


Input:	125V~/12A, 60Hz
Breaker:	15A, 250 VAC
Outlets:	4 timed (A, B, C, D) up to 10A
Auxiliary outlets:	1A each (controlled by main power switch)
Power Cord:	IEC quick-release (replaceable)
	8' nominal, 14 AWG, 3-wire
Power switch:	15A (externally accessible)






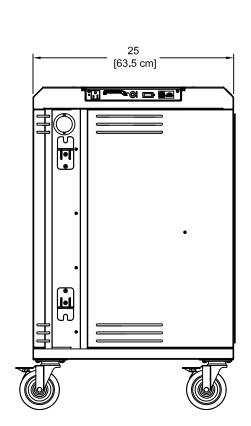

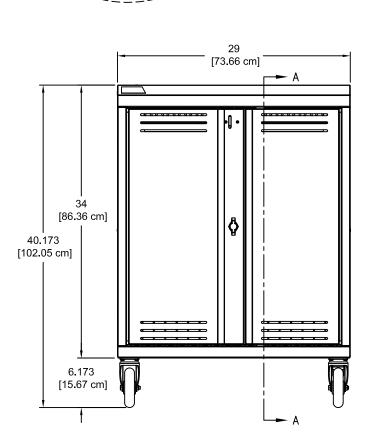


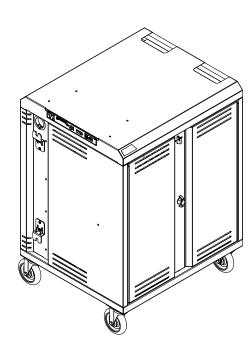

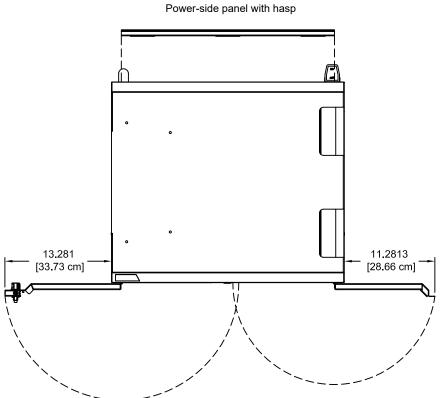


Connect36 Cart


Connect36 Section view A-A

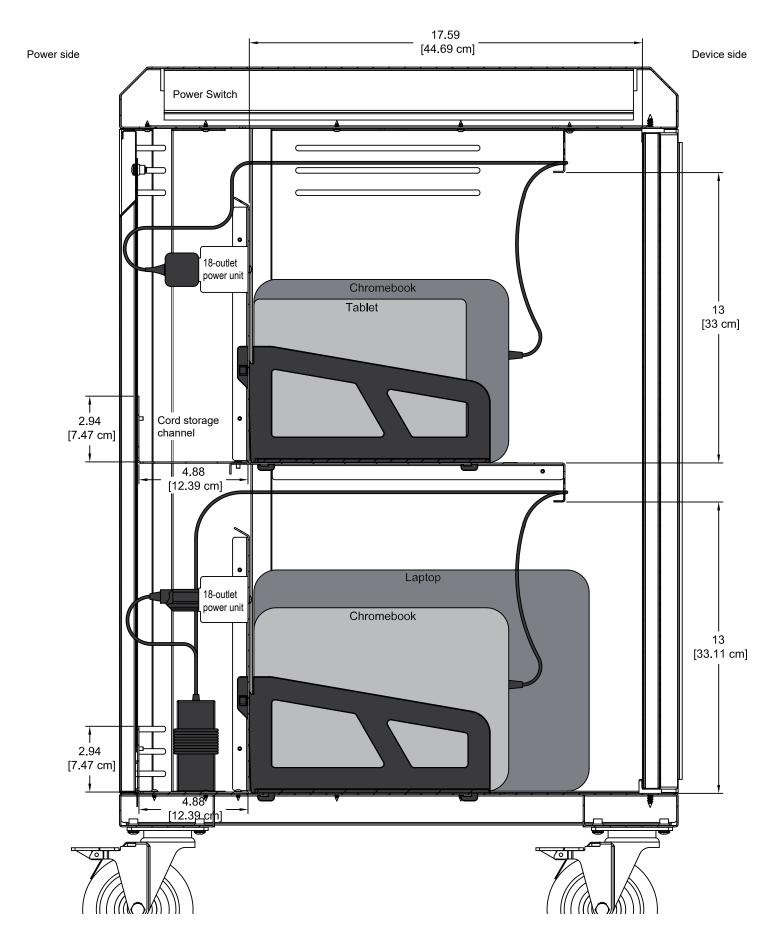

Connect36 Device side view wiring diagram (shown with doors open)

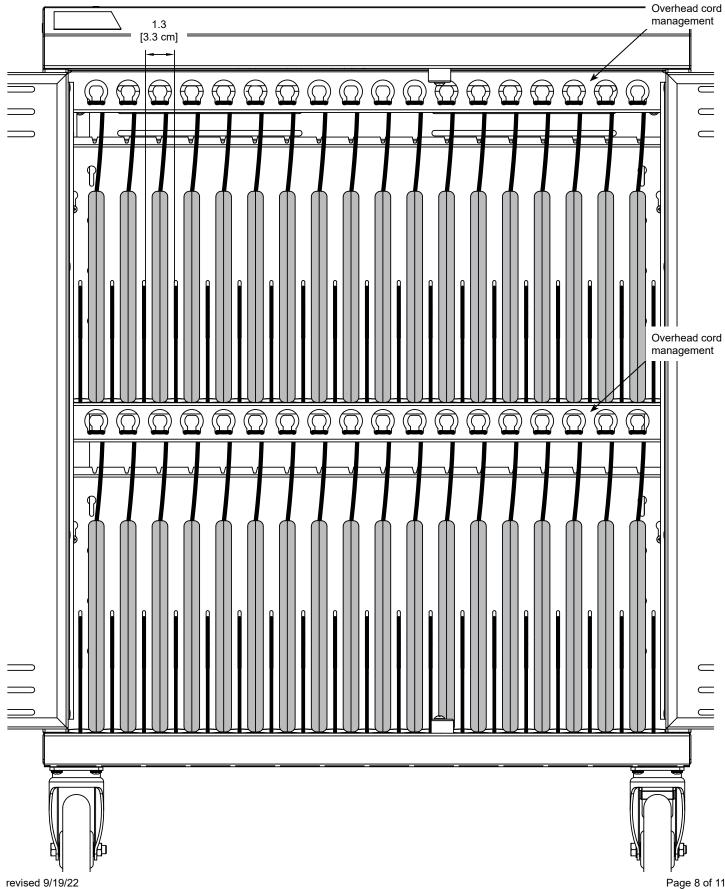


Connect36 Power side wiring diagram (shown with standard outlets, and locking panel removed)

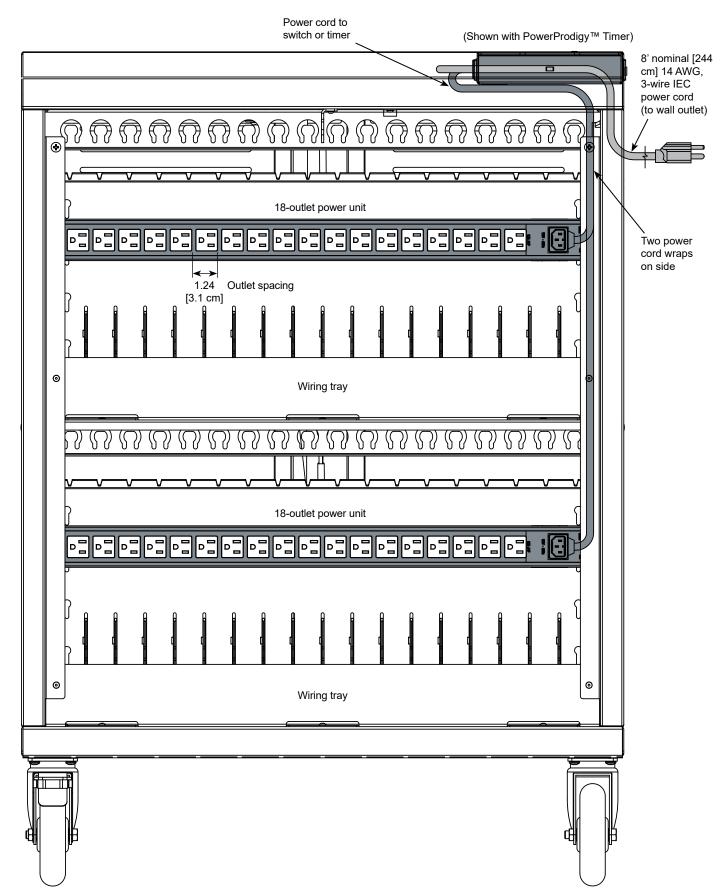

Accessories





<i>/</i> ``		
В	1" [25.4 mm]	
С	.983" [25 mm]	
D	2.07" [52.5 mm]	
Е	.987" [25.1 mm]	



Re-programmable 4-digit Combination Lock - 95536

- Set your own 4-digit personalized combination (up to 10,000 options)
- 5/16" hardened steel shackle for cut-resistance
- · Black powdercoated die-cast body for durability
- Change key included
 Unit weight: .55 lb [.25 kg]

Hook-and-loop Strap Kit - 95004

(16) .75" [1.91 cm] x 12" [30.48 cm], and (32) .75" [1.91 cm] x 5" [12.7 cm]

> See spectrumfurniture.com for the latest accessories and detailed warranty information.

We will make it right for you!

Thanks for choosing Spectrum! Spectrum is committed to provide complete customer satisfaction. Each of our products is manufactured from the best materials available and each product is stringently monitored throughout the production process through our P.A.C.E. program (Product Assurance to meet Customer Expectations).

We expressly warrant that Spectrum products will be of good quality and workmanship and free from defect for the period set out in the warranty from the date of delivery.

For a listing of all product specific warranty terms please visit our website at:

https://www.spectrumfurniture.com/en/resources/purchasing-terms-warranty

1-800-235-1262

Toll-free HELPLINE

spectrum@spectrumfurniture.com